

# *Perry Industrial Elevator*



+44 (0)1404 890300  
[www.perryengineering.com](http://www.perryengineering.com)




Capacities of up to 1000tph based on wheat at 750kg/m<sup>3</sup> suitable for full commercial use.

Stainless steel / galvanised steel / mild steel powder coat painted construction options.

Head shaft, head pulley and bearing assembly easily removed in one piece.  
Shafts fitted nylon or felt shaft seals as standard.

Belt tensioning by adjustable boot shaft.

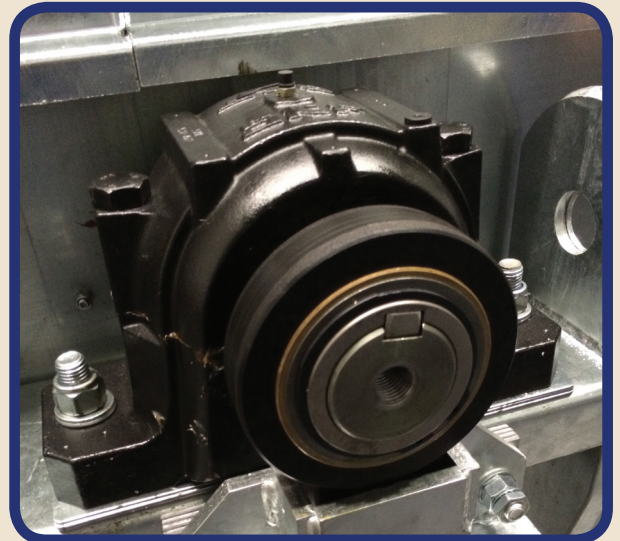

Solid crowned head drum as standard - boot drums slatted as standard with our configurations available depending on product requirements.

Large removable inspection panel for maintenance and efficient installation of the belt and bucket assembly.



*Call us today on +44 (0)1404 890300 to speak to us about our industrial elevators!*

# Perry Industrial Elevator



+44 (0)1404 890300  
www.perryengineering.com

Model	Capacity Fast Centrifugal	Head Casing	Boot Casing	Trunk Thickness (up to 20m)	Trunk Thickness (above 20m)
250	30-80tph	3mm	3mm	1.5mm	2mm
330	100-150tph	3mm	3mm	1.5mm	2mm
420	200-250tph	3/5mm	3/5mm	2mm	3mm

## What's included:

- Head and boot supplied fully built.
- Solid pulley in head and slatted pulley in boot as standard.
- Trunks supplied in standard lengths of 2.4m, 1.8m, 1.5m, 1.2m, 0.9m & 0.6m.
- Drive fitted with lubricant filled shaft mounted gearbox.
- Nitrile (oil resistant) belt fitted as standard.
- Constructed from pregalvanised / hot dip galvanising.
- Buckets - supplied loose with a prepunched belt and belt joiner.



## Optional extras:

- Inlet hopper (with or without slide).
- Weather proofing.
- Access platform and ladder.
- Soaker flange.
- Slow centrifugal and gravity feed.



*Call us today on +44 (0)1404 890300 to speak to us  
about our industrial elevators!*