

Perry Tubular Conveyor



+44 (0)1404 890300
www.perryengineering.com




Standard diameters from 150mm to 1000mm.
Larger diameters on request.

Stainless steel / galvanised steel / mild steel
powder coat painted construction options.

Flighting options: various thicknesses,
ribbon flight, reduced pitch, tapered,
mixing, hardened or paddle flights.

Drive configurations to suit every
customer's needs.

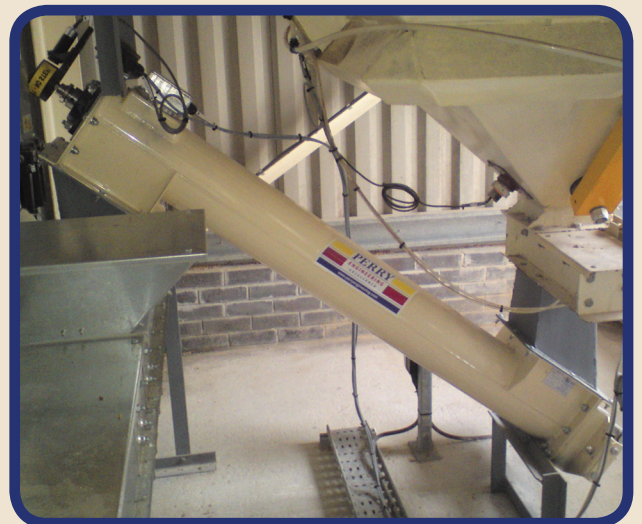

Can be inclined up to vertical.
General conveying, intermediate
outlets available.
Suitable for stop / start operation.

*Call us today on +44 (0)1404 890300 to speak to us
about our tubular conveyors!*

Perry Tubular Conveyor



+44 (0)1404 890300
www.perryengineering.com

Model	Capacity	Shaft Diameter	Centre Tube Diameter	Case Thickness
150A	20ph	40mm	60mm	2mm
200A	53tph	40mm	60mm	2mm
250A	115tph	50mm	76mm	2mm
300A	200tph	50mm	76mm	2mm

*Based on 45 degree inclined machines.

What's included:

- 2mm thick tubular trough casing with 3mm thick flanges - galvanised construction.
- Factory assembled drive.
- Motor to Vee belt drive fitted as standard.
- Tail end supplied fully assembled.
- Troughs supplied in standard lengths of 3m, 2m and 1m.
- One flanged outlet, flanged joints.
- Overload protection switch fitted above end outlet.
- Intermediate bearings on lengths over 3.5m.



Optional extras:

- Auto greaser.
- Loose inlet.
- Weather proofing.
- Hand operated, rack & pinion, motorised or electro pneumatic slides.
- Overload protection diaphragm switch.



Call us today on +44 (0)1404 890300 to speak to us about our tubular conveyors!